



# T1M1UNV0350-15L

IP64

Dimmable  
100%–10%

UL US  
LISTED  
E342838

RoHS  
COMPLIANT


## INSTALLATION INSTRUCTIONS




### NOTE:

1. Driver has two (2) mounting tabs with a semi-round hole each.
2. Fasten / Drill a screw through each of the driver's semi-round holes and the surface where the driver will be mounted.
3. Driver must make full contact with surface for proper thermal management. und holes and the surface where the driver will be mounted.

## WIRING DIAGRAM

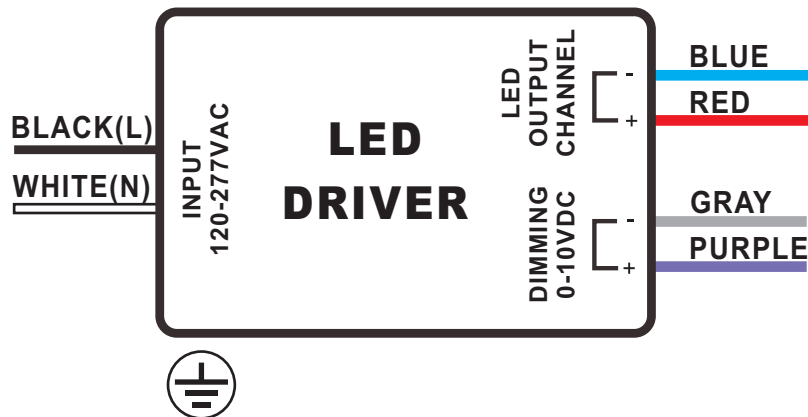

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
BLACK	12" [304.8mm]	RED	6" [152.4mm]
WHITE	12" [304.8mm]	BLUE	6" [152.4mm]
		PURPLE	12" [304.8mm]
		GRAY	12" [304.8mm]



### NOTE:

1. The driver must be installed by a licensed electrician.
2. The driver must be grounded.