



T1M1UNV134P-75L

IP20 

Programmable Constant Current

- Input Voltage: 120V - 277VAC 50/60Hz
- Output Current Range: 450mA - 1340mA
- Output Voltage Range: 19V - 56VDC
- Output Power: 75W Max.
- 0-10V Dimming, Isolated
- Dimming Range: 100% -1%, 0% (Dim-to-Off)

General Specifications

Input Voltage / Frequency	120V - 277VAC 50/60Hz \pm 10%
Input Current	0.88A @120V, 0.44A @240V and 0.38A @277V
Input Power	84W
Power Factor	> 0.9 under 120~277Vac input with 80~100% load condition (for all output currents)
THD	< 20% under 120~277Vac input with 80~100% load condition (for all output currents)
Efficiency	89%
Inrush Current	45A @277V
Leakage Current	Maximum 0.5mA at 277Vac, 60Hz input
Open Circuit Voltage	60V
Driver Type	Constant Current
Programming Type	Wireless, TPSB-100AW NFC Digital Wand
Output Voltage Range	19VDC - 56VDC
Output Current Range	450mA - 1340mA (programmable in 10mA increments)
Output Power	75W Max.
Aux Output	12V/200mA Max.
Load Regulation	\pm 2%
Line Regulation	\pm 1%
Current Tolerance	\pm 5% at full load condition
Turn-on Delay Time	< 2s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	< 2W
Ripple & Noise (pk-pk)	< 3%
Withstand Voltage	I/P - O/P, 2,800Vdc, 2mA
Dimming Type	0-10V Dimming, Isolated
Dimming Range	100% -1%, 0% (Dim-to-Off)
Operating Ambient Temperature Range	-40 ~ 50°C
Storage Temperature	-40 ~ 85°C
Maximum Driver Case Temperature (Tc)	90°C
Humidity	5% to 95%
Driver Output Type / Number of Output Channels	LED Class 2 / 1 Channel
Overall Size	16.89" L x 1.18" W x 1.00" H (429 x 30 x 25.4mm), Mounting 16.02" (407mm)
Weight	1.1lbs (0.5kg) / Unit
Case Construction	Metal
Input / Output Connector Type	I/P: 18 AWG x 2C (30cm) ; O/P: 22AWG x 2C (30cm) ; connector
Safety / Compliance	UL8750, Class P, Type HL Suitable for Dry and Damp locations
IP Rating	IP20
EMC	FCC, 47CFR Part 15; ANSi C63.4:2009 Class B (Consumer Limit)
Protections	Over Voltage Protection Over Current Protection Short Circuit Protection Over Temperature Protection
Service Life	85,000 hours lifetime @ Tc 60°C
Warranty	5 years @ Tc 60°C from the date of manufacture



T1M1UNV134P-75L

IP20 

Charts

Figure 1

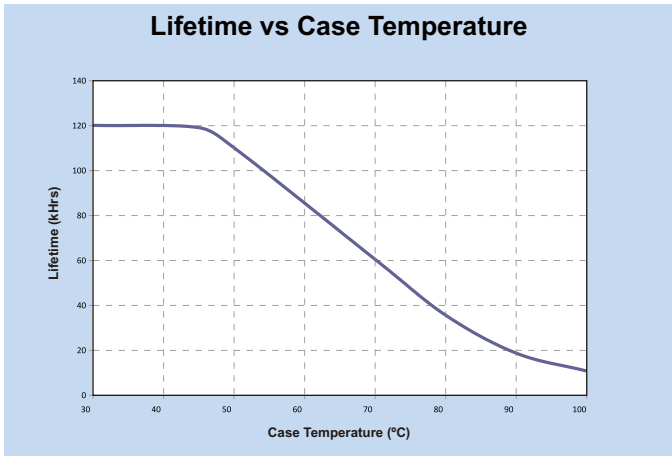


Figure 2

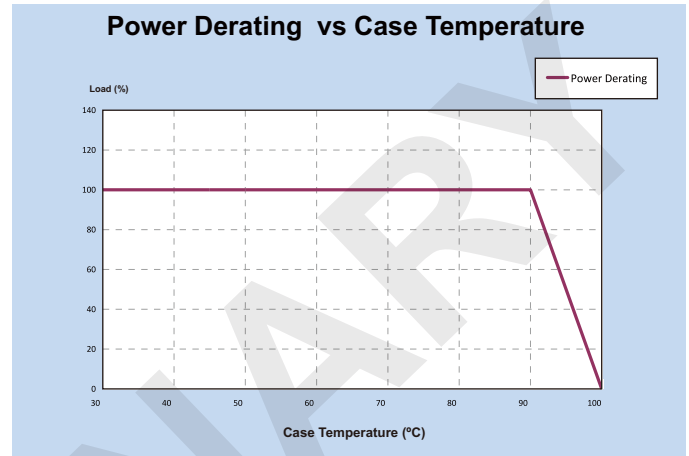


Figure 3

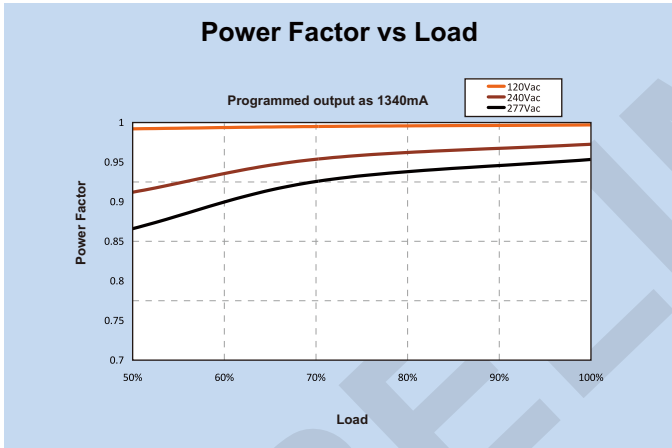


Figure 4

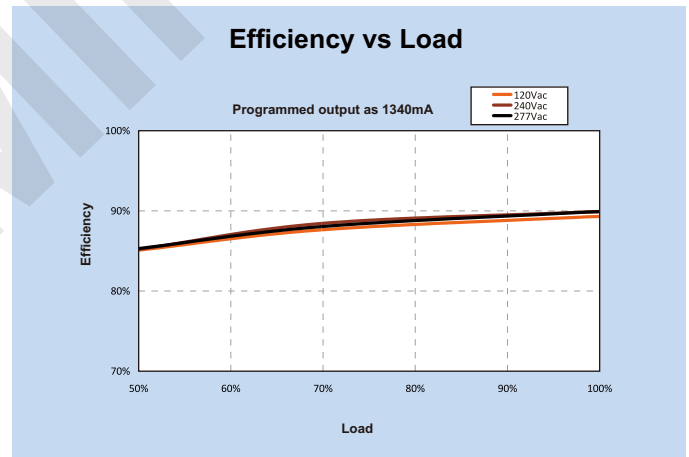


Figure 5


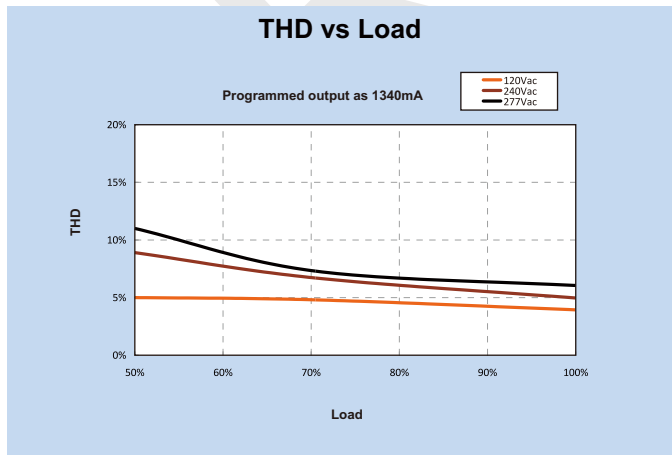



Figure 6




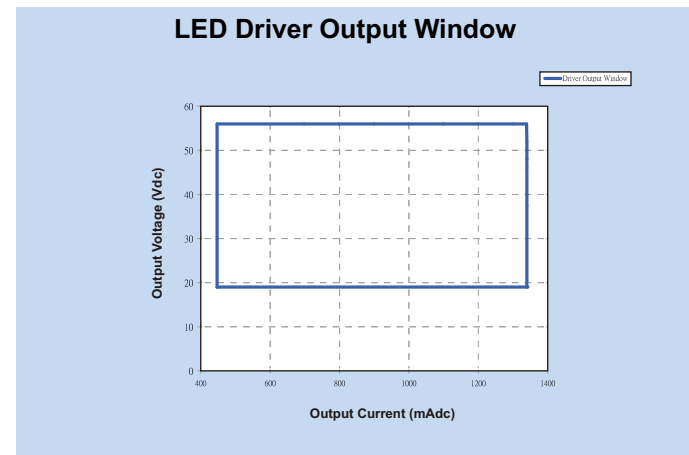

T1M1UNV134P-75L

IP20 

Mechanical Drawings

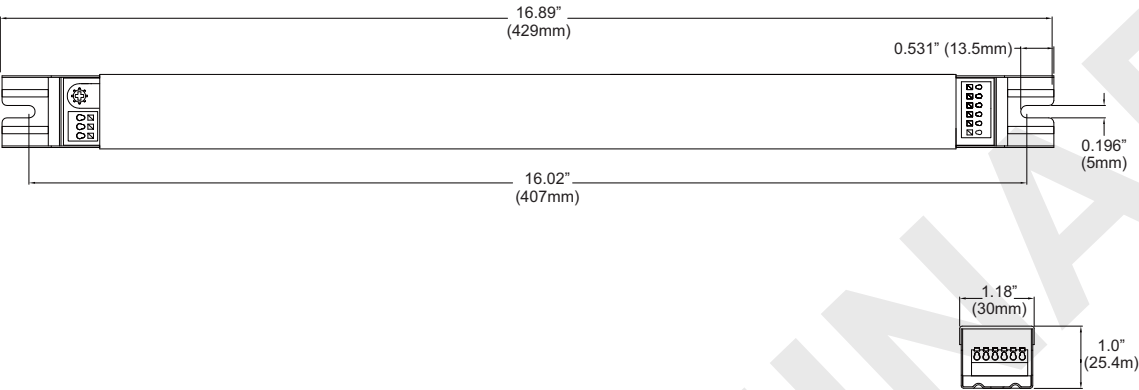

Overall Dimensions	
Length	16.89" [429mm]
Width	1.18" [30mm]
Height	1.0" [25.4mm]
Mounting	16.02" [407mm]
Wire Length	
Input/Output	Terminal Block
0-10V Dimming	Terminal Block"

Wire Diagram

Ground	Green	Blue	VO (-): LED load, negative (-)
Neutral	White	Red	VO (+): LED load, positive (+)
Live	Black	Orange	BTIN: N/C
		Yellow	Aux 12Vdc (+): Auxiliary 12Vdc output, positive (+)
		Grey	RTN: Dimming and auxiliary output, negative (-)
		Purple	Dimming (+): Dimming, positive (+)
		NFC ANTENNA	•) NFC

NOTES :

- 1) This driver must be installed by a licensed electrician
- 2) This driver must be grounded



T1M1UNV134P-75L

IP20 

Guidelines

Grounding

- Driver must be grounded by means of the Driver case.

Over temperature protection

- The Fulham ThoroLED drivers is protected against thermal overload. If the temperature limit is exceeded, the output current is reduced.

LED load

- Fulham ThoroLED drivers are designed to drive passive LEDs, -COB's and -LED assemblies .Proper function is not guaranteed when (LED)loads with active components are used.

Short-circuit protection

- In case of a short circuit the LED driver switches to protection mode. After the removal of the short-circuit the LED driver will recover automatically.

No-load Operation

- In no-load operation the output voltage will not exceed the specified open circuit output voltage.

Hot Swapping

- This driver does not support hot swapping of the LEDs.

Remote Mounting

- Up to 27ft with 18AWG. Contact Fulham for higher remote distance.

Service life/Lifetime

- Failure Rate Info based upon MTBF modeling: 90% survivals at end of life @ $\leq T_c$ lifetime rating.

Warranty

- Reference Fulham's limited Warranty: <https://cdn.fulham.com/PDFs/Limited-Warranty.pdf>



T1M1UNV134P-75L


IP20 

Programing Tool

- 1) To program this LED driver use the Fulham TPSB-100AW NFC Digital Wand.
 - 2) Please consult the user manual for instructions on using the TPSB-100AW FC Digital Wand.
- Note: The LED driver can only be programmed in 10mA increments.



Toggle switch on side
Upward: Easy Mode
Downward: Advanced Mode

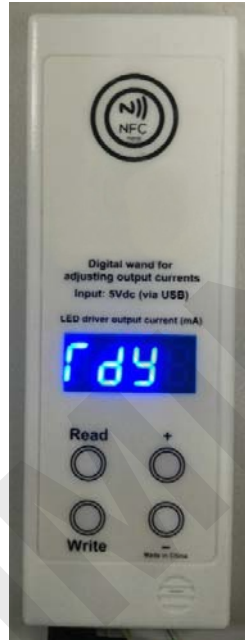

Ready State
Of
Advanced Mode



Program State
Of
Advanced Mode



T1M1UNV134P-75L

IP20 

Part Number Matrix

T **1** **M** **1** **UNV** **134** **P** **75** **L**

LED Driver

T = ThoroLED

of Control Channels

1 = 1 Channel

Dimming Control Type

M = 0-10V

of Control Channels

1 = 1 Channel

Input Voltage

UNV = 120V~277V

Output Current

134 = 1340mA Max.

Characteristic

P = Programble

Max. Output Power

75 = 75W

Case Type


L = Long

Product Image



Packaging

Master Carton

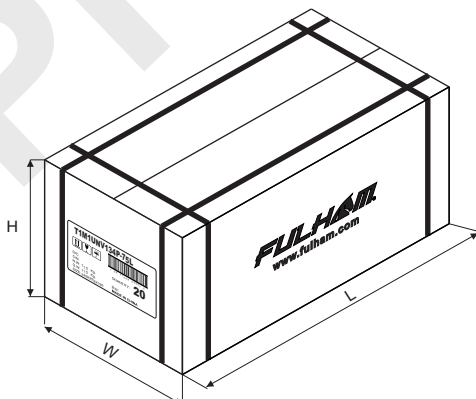

OUTER DIMENSION		
L	W	H
19.68"(500mm)	10.62"(270mm)	5.31"(135mm)
Net Weight	Gross Weight	QUANTITY
22.04 lbs. (10 kg)	25.35 lbs. (11.5 kg)	20pcs.