



# T1M1UNV260P-85L

IP20 

## Programmable Constant Current


- Input Voltage: 120V - 277VAC 50/60Hz
- Output Current Range: 860mA - 2600mA
- Output Voltage Range: 10V - 56VDC  $\equiv$
- Output Power: 85W Max.
- 0-10V Dimming
- Dimming Range: 100% -1%, (Dim-to-off)

### General Specifications

Input Voltage / Frequency	120V - 277VAC 50/60Hz $\pm$ 10%
Input Current	0.89A @120V, 0.44A @240V and 0.38A @277V
Input Power	100W
Power Factor	> 0.9 under 120~277Vac input with 80~100% load condition (for all output currents)
THD	< 20% under 120~277Vac input with 80~100% load condition (for all output currents)
Efficiency	85% @120V, 86.5% @277V
Inrush Current	10A @120V
Leakage Current	Maximum 0.5mA at 277Vac, 60Hz input
Open Circuit Voltage	60V
Driver Type	Constant Current
Programming Type	Wired, TPSB-100A Programmer
Output Voltage Range	10VDC - 56VDC $\equiv$
Output Current Range	860mA - 2600mA (programmable in 10mA increments)
Output Power	85W Max.
Aux Output	12V/200mA Max.
Load Regulation	$\pm$ 2%
Line Regulation	$\pm$ 1%
Current Tolerance	$\pm$ 5% at full load condition
Turn-on Delay Time	< 0.75s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	< 2W
Ripple & Noise (pk-pk)	< 3%
Withstand Voltage	I/P - O/P, 2,800Vdc, 2mA
Dimming Type	0-10V Dimming
Dimming Range	100% -1%, (Dim-to-off)
Operating Ambient Temperature Range	-40 ~ 50°C
Storage Temperature	-40 ~ 85°C
Maximum Driver Case Temperature (Tc)	90°C
Humidity	5% to 95%
Driver Output Type / Number of Output Channels	LED Class 2 / 1 Channel
Overall Size	16.89" L x 1.18" W x 1.00" H (429 x 30 x 25.4mm), Mounting 16.02" (407mm)
Weight	1.1lbs (0.5kg) / Unit
Case Construction	Metal
Input / Output Connector Type	I/P: 18 AWG x 2C (30cm) ; O/P: 22AWG x 2C (30cm) ; connector
Safety / Compliance	UL8750, Class P, Type HL Suitable for Dry and Damp locations
IP Rating	IP20
EMC	FCC, 47CFR Part 15; ANSi C63.4:2009 Class B (Consumer Limit)
Protections	Over Voltage Protection Over Current Protection Short Circuit Protection Over Temperature Protection
Service Life	85,000 hours lifetime @ Tc 60°C
Warranty	5 years @ Tc 60°C from the date of manufacture



# T1M1UNV260P-85L

IP20 

## Charts

Figure 1

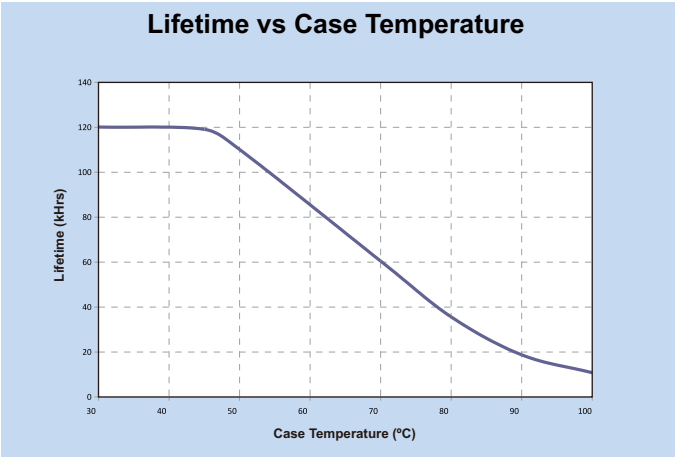


Figure 2

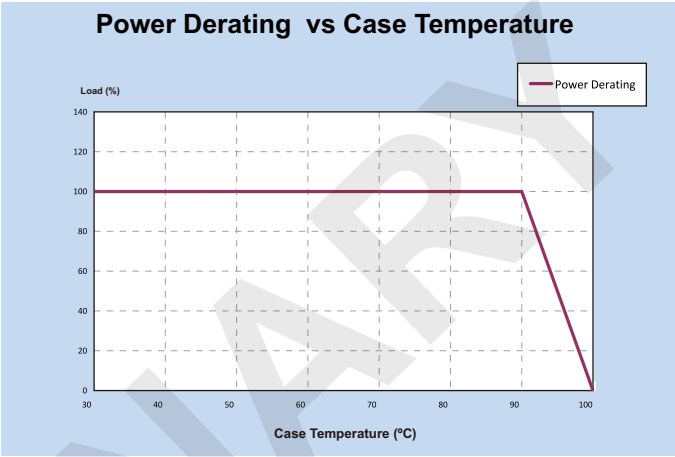


Figure 3

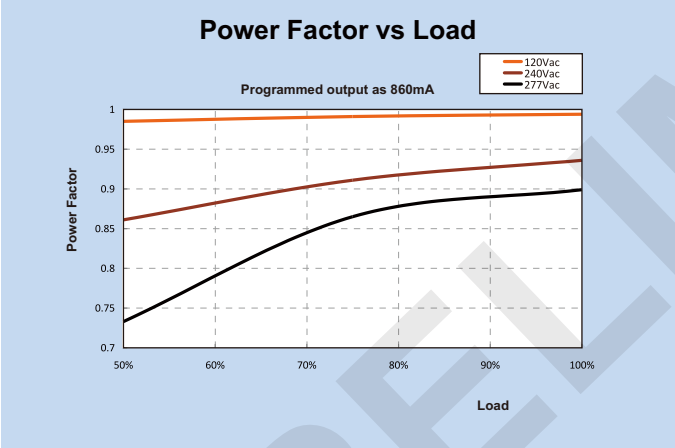


Figure 4

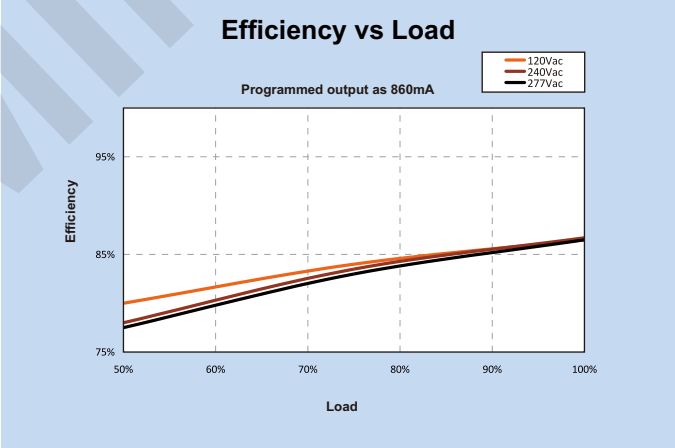


Figure 5


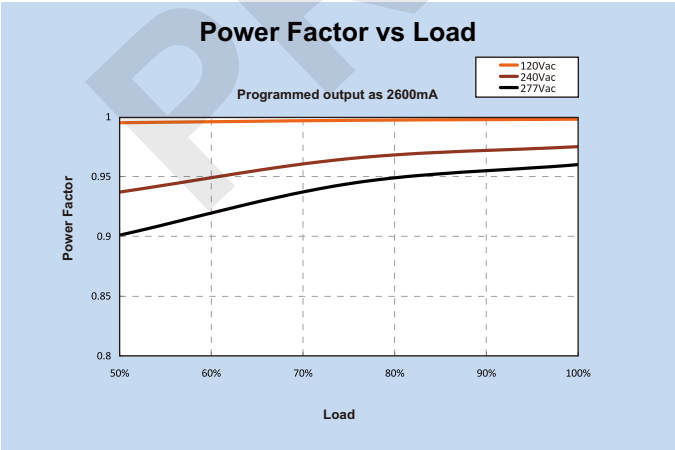


Figure 6



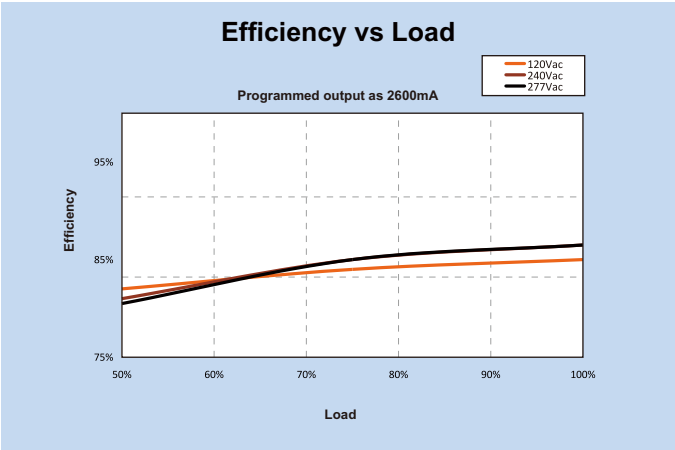


# T1M1UNV260P-85L

IP20 


## Charts

Figure 7

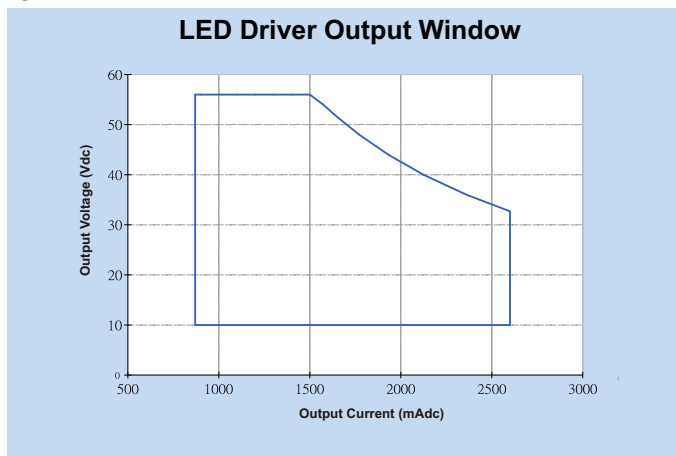




# T1M1UNV260P-85L


IP20 

## Mechanical Drawings

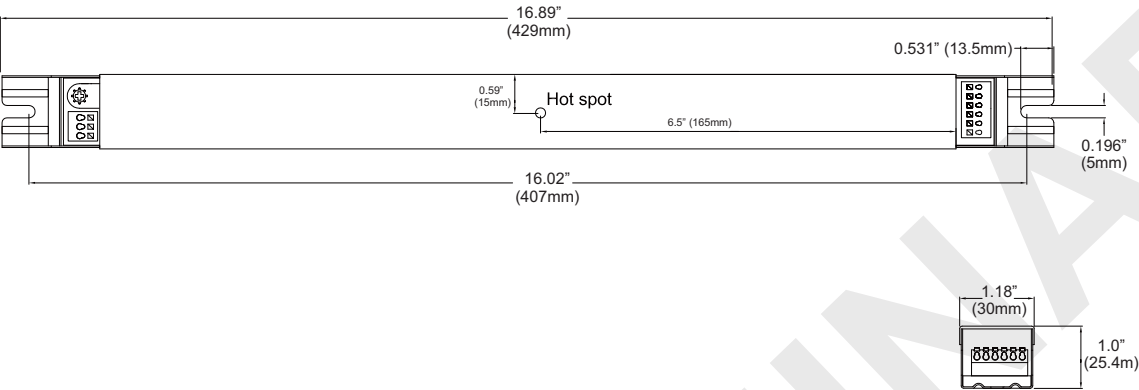

Overall Dimensions	
Length	16.89" [429mm]
Width	1.18" [30mm]
Height	1.0" [25.4mm]
Mounting	16.02" [407mm]
Wire Length	
Input/Output	Terminal Block
0-10V Dimming	Terminal Block

## Wire Diagram

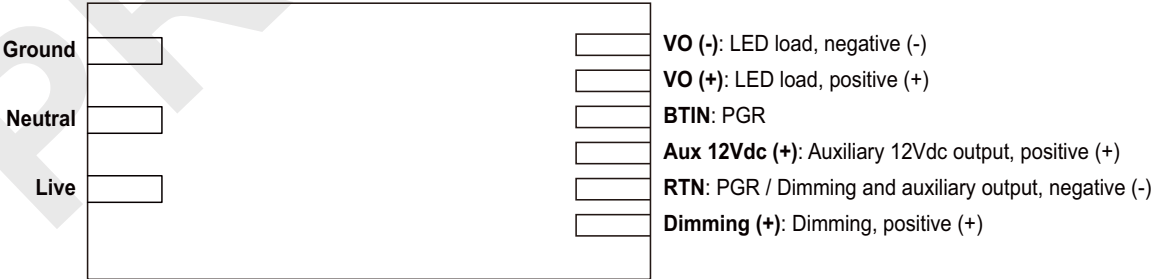

### NOTES :

- 1) This driver must be installed by a licensed electrician
- 2) This driver must be grounded



# T1M1UNV260P-85L

IP20 

## Guidelines

### Grounding

- Driver must be grounded by means of the Driver case.

### Over temperature protection

- The Fulham ThoroLED drivers is protected against thermal overload. If the temperature limit is exceeded, the output current is reduced.

### LED load

- Fulham ThoroLED drivers are designed to drive passive LEDs, -COB's and -LED assemblies .Proper function is not guaranteed when (LED)loads with active components are used.

### Short-circuit protection

- In case of a short circuit the LED driver switches to protection mode. After the removal of the short-circuit the LED driver will recover automatically.

### No-load Operation

- In no-load operation the output voltage will not exceed the specified open circuit output voltage.

### Hot Swapping

- This driver does not support hot swapping of the LEDs.

### Remote Mounting

- Up to 24ft with 18AWG. Contact Fulham for higher remote distance.

### Service life/Lifetime

- Failure Rate Info based upon MTBF modeling: 90% survivals at end of life @  $\leq T_c$  lifetime rating.

### Warranty

- Reference Fulham's limited Warranty: <https://cdn.fulham.com/PDFs/Limited-Warranty.pdf>




# T1M1UNV260P-85L

IP20 

## Programing Tool


- 1) To program this LED driver use the Fulham TPSB-100A programmer.
  - 2) Please consult the user manual for instructions on using the TPSB-100A programmer.
- Note: The LED driver can only be programmed in 10mA increments.

## Programming Connection Diagram

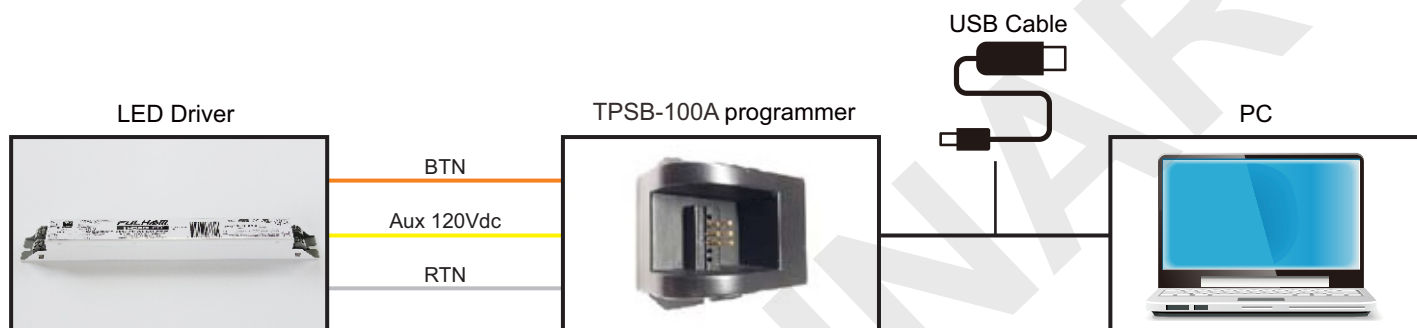



# T1M1UNV260P-85L

IP20 

## Part Number Matrix


<u>T</u>	<u>1</u>	<u>M</u>	<u>1</u>	<u>UNV</u>	<u>260</u>	<u>P</u>	<u>85</u>	<u>L</u>
<u>LED Driver</u>	<u># of Control Channels</u>	<u>Dimming Control Type</u>	<u># of Control Channels</u>	<u>Input Voltage</u>	<u>Output Current</u>	<u>Characteristic</u>	<u>Max. Output Power</u>	<u>Case Type</u>
T = ThoroLED	1 = 1 Channel	M = 0-10V	1 = 1 Channel	UNV = 120V~277V	260 = 2600mA Max.	P = Programmable	85 = 85W	L = Long

## Product Image



## Packaging

### Master Carton

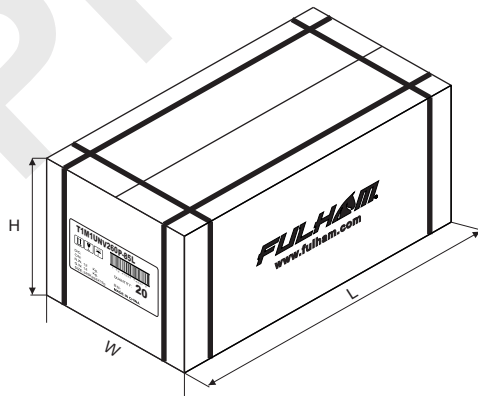

OUTER DIMENSION		
L	W	H
19.68"(500mm)	10.62"(270mm)	5.31"(135mm)
Net Weight	Gross Weight	QUANTITY
22.04 lbs. (10 kg)	25.35 lbs. (11.5 kg)	20pcs.