



VMU140055LP8xxC



46"LP-LINEARHO DC MODULE, 1400mA MAX CURRENT

- Low Profile design, no magnets
- Direct mount to luminaire housing
- Superior thermal performance than standard LinearHO
- Higher aluminum material density
- Extruded Aluminum material for thermal management
- High lumen, high efficacy
- Accessories: Diffused lens compatible
- For use in UL Class 2 lighting systems
- Suitable for DLC applications: L70>54,000hrs / L90=39,000hrs
- Meets UL8750 recognized
- RoHS compliant
- The module is supplied by short circuit proof SELV controlgear

General Specifications


	Min.	Typical	Max.
Input Voltage ^①	30.7VDC	33.3VDC	35.8VDC
Input Current ^①	150mA	700mA	1400mA
Input Power ^①	4.6W	23.3W	50.1W
Initial Lumens @4000K / 80CRI	1,049 lumens	4,593 lumens	8,945 lumens
Initial Lm/W @4000K / 80CRI	228 lm/W	197 lm/W	178 lm/W
Beam Angle	120°		
CRI	80CRI (standard), 90CRI available		
Storage Temperature Range	-40°C to 100°C / -40°F to 212°F		
Operating Temperature Range (ta)	-40°C to 55°C / -40°F to 131°F		
Maximum Case Temperature (Tc)	L70: Tc max 105°C / L90: Tc max 105°C		
Estimated Lumen Maintenance ^②	L70: >54,000Hrs / L90: 39,000Hrs		
Color Consistency	Binning per ANSI C78.377-2015 @ 25°C; 3 SDCM		
Overall Size	46" L x 1.26" W x 0.29" H (1168mm x 32mm x 7.4mm)		
PCB Material / Thermal Conductivity	MCPCB (Aluminum Clad)/ 1.5W / mK		
Extruded Material / Finish	Aluminum/surface treatment with Anodic Oxidation		
LED Quantity	108pcs.		
Module Weight	295g / 0.65lb		
PCB Part Number	PTL028C01M1		
Maximum Screw Installation Torque	25 inch - ounces		
Connector Type	WAGO #2060-452 / 998-404 (2 pin connector)		
Packaging: Master Carton	40pcs.		
Thermal Feedback	Not Available		
Safety/Compliance	cURus (File # E351548) Suitable for UL Class 2 Lighting Systems RoHS Compliant Dry and Damp Location CE (IEC 62031: 2008. AMD1: 2012, AMD2: 2014) SELV		
Energy Efficiency Label (EEI-Label)	C		
Warranty	5 years @ Max. Tc from the date of manufacture		

^① Nominal ratings. Performance based on Tc mod = 25°C. See thermal de-rating chart (pg. 3) for higher temperature operation

^② TM-21 Reported Numbers



VMU140055LP8xxC



Electrical and Optical Specifications

LED Module Part Number	Number of LED	Input Current	Nom. Forward Voltage	Nom. Rated Power	Max. Fwd. Voltage	Max. Rated Power	Nom. Lum. Flux @4000K/80 CRI	Nom. Efficacy @4000K/80 CRI
VMU140055LP8xxC (46")	108	150 mA	30.7 VDC	4.6 W	34 VDC	5 W	1049 lm	228 lm/W
		200 mA	31.0 VDC	6.2 W	34 VDC	7 W	1376 lm	222 lm/W
		250 mA	31.2 VDC	7.8 W	34 VDC	9 W	1702 lm	218 lm/W
		300 mA	31.5 VDC	9.4 W	35 VDC	11 W	2027 lm	215 lm/W
		350 mA	31.7 VDC	11.1 W	35 VDC	12 W	2351 lm	212 lm/W
		400 mA	31.9 VDC	12.8 W	35 VDC	14 W	2674 lm	209 lm/W
		450 mA	32.2 VDC	14.5 W	35 VDC	16 W	2996 lm	207 lm/W
		500 mA	32.4 VDC	16.2 W	36 VDC	18 W	3317 lm	205 lm/W
		550 mA	32.6 VDC	17.9 W	36 VDC	20 W	3638 lm	203 lm/W
		600 mA	32.8 VDC	19.7 W	36 VDC	22 W	3957 lm	201 lm/W
		650 mA	33.1 VDC	21.5 W	36 VDC	23 W	4276 lm	199 lm/W
		700 mA	33.3 VDC	23.3 W	37 VDC	26 W	4593 lm	197 lm/W
		750 mA	33.5 VDC	25.1 W	37 VDC	28 W	4910 lm	196 lm/W
		800 mA	33.7 VDC	26.9 W	37 VDC	30 W	5226 lm	194 lm/W
		850 mA	33.9 VDC	28.8 W	37 VDC	31 W	5541 lm	192 lm/W
		900 mA	34.1 VDC	30.7 W	37 VDC	33 W	5855 lm	191 lm/W
		950 mA	34.3 VDC	32.6 W	38 VDC	36 W	6168 lm	189 lm/W
		1000 mA	34.4 VDC	34.4 W	38 VDC	38 W	6480 lm	188 lm/W
		1050 mA	34.6 VDC	36.4 W	38 VDC	40 W	6791 lm	187 lm/W
		1100 mA	34.8 VDC	38.3 W	38 VDC	42 W	7101 lm	185 lm/W
		1150 mA	35.0 VDC	40.2 W	38 VDC	44 W	7411 lm	184 lm/W
		1200 mA	35.2 VDC	42.2 W	39 VDC	47 W	7720 lm	183 lm/W
		1250 mA	35.3 VDC	44.1 W	39 VDC	49 W	8027 lm	182 lm/W
		1300 mA	35.5 VDC	46.1 W	39 VDC	51 W	8334 lm	181 lm/W
		1350 mA	35.6 VDC	48.1 W	39 VDC	53 W	8640 lm	180 lm/W
		1400 mA*	35.8 VDC	50.1 W	39 VDC	55 W	8945 lm	178 lm/W

Luminous Flux De-Rating: CCT and CRI Multipliers

	2700K	3000K	3500K	4000K	5000K	5700K	6500K
CRI 80(R9> 0)	0.929	0.955	0.968	1.000	1.013	1.006	1.000
CRI 90(R9>50)	0.776	0.801	0.821	0.863	0.869	0.865	0.863

NOTES:

- 1) Performance based on Tc mod = 25°C. See thermal de-rating chart (pg. 3) for higher temperature operation
- 2) Standard lumen output and efficacy is calculated for standard options. Reference CCT & CRI vs Luminous Flux chart for lumen ratio calculation.
- 3) Specifications are subject to change without notice.
- 4) The LED DC Module can be configured with different LED chip quantities, series and parallel design configurations to meet a specific design requirement. Contact Fulham for further assistance.
- 5) * Indicates maximum rated current. Modules may be operated at a current less than or equal to this value, below the Tc rating.
- 6) 70CRI is NOT available.



VMU140055LP8xxC



Thermal Specifications

LP-LinearHO DC Module

Storage Temperature Range	-40 to +100°C / -40 to +212°F
Operating Ambient Temperature Range (ta)	-40 to 55°C / -40 to 131°F
Maximum Case Temperature (Tc)	L70 = 105°C (221°F) / L90 = 105°C (221°F)




Thermal De-Rating

Tc vs. Luminous Flux vs. Forward Voltage

Module Case Temperature (Tc)	Total Vf Multiplier	Luminous Flux Multiplier
25°C	1.000	1.000
30°C	0.998	0.995
35°C	0.996	0.990
40°C	0.994	0.985
45°C	0.992	0.979
50°C	0.990	0.974
55°C	0.988	0.968
60°C	0.986	0.962
65°C	0.985	0.956
70°C	0.983	0.950
75°C	0.981	0.944
80°C	0.979	0.938
85°C	0.977	0.931
90°C	0.975	0.925
95°C	0.974	0.918
100°C	0.972	0.911
105°C	0.970	0.904

Module Tc vs. Ambient (ta) vs. Module Input Current (mA)

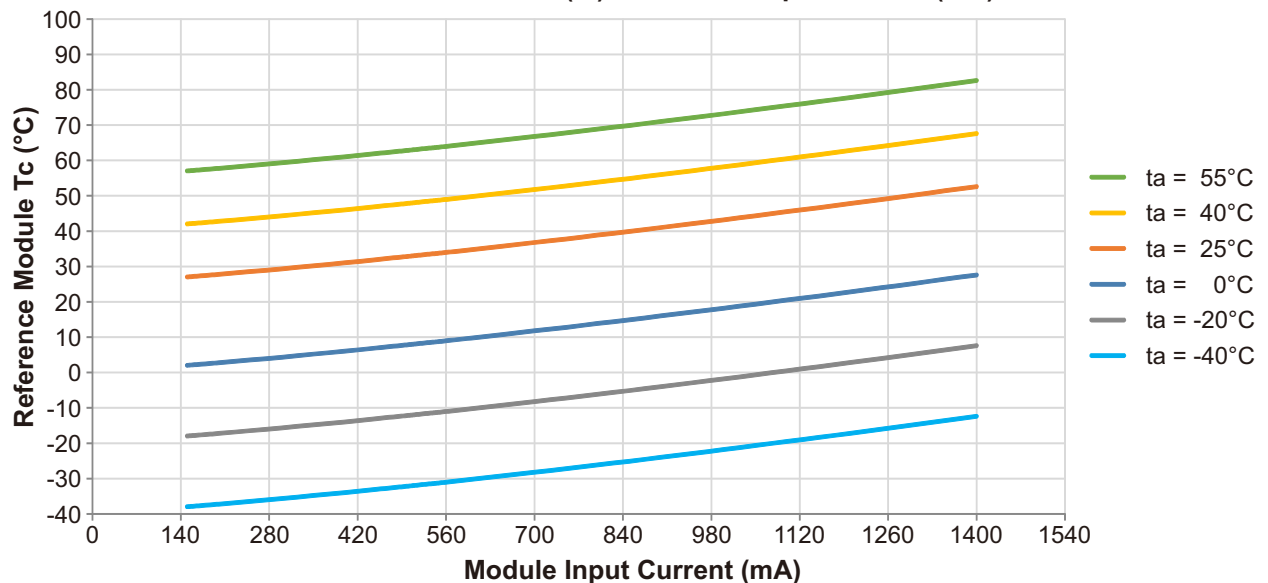

NOTES:

1) Chart "Module Tc vs. Ambient (ta) vs. Module Input Current (mA)" for reference only in an open ambient. The performance with in a luminaire will vary depending on the size and material of luminaire.



VMU140055LP8xxC



Certification Chart



Classification	Model
RoHS COMPLIANT	YES
cUL US	YES
CE UK CA	YES
Energy Efficiency Label (EEI-Label)	C
Suitable for UL Class 2 Lighting System	YES

Energy Star™ TM-21 Calculator Data

Tc Module	Reported L70	Reported L90
55°C	>54,000 Hrs	53,000 Hrs
85°C	>54,000 Hrs	43,000 Hrs
105°C	>54,000 Hrs	39,000 Hrs

Tc Module	Calculated L70	Calculated L90
55°C	174,000 Hrs	53,000 Hrs
85°C	142,000 Hrs	43,000 Hrs
105°C	127,000 Hrs	39,000 Hrs

LED Lumen & Color Maintenance Data per LM-80 report and TM-21 Calculator

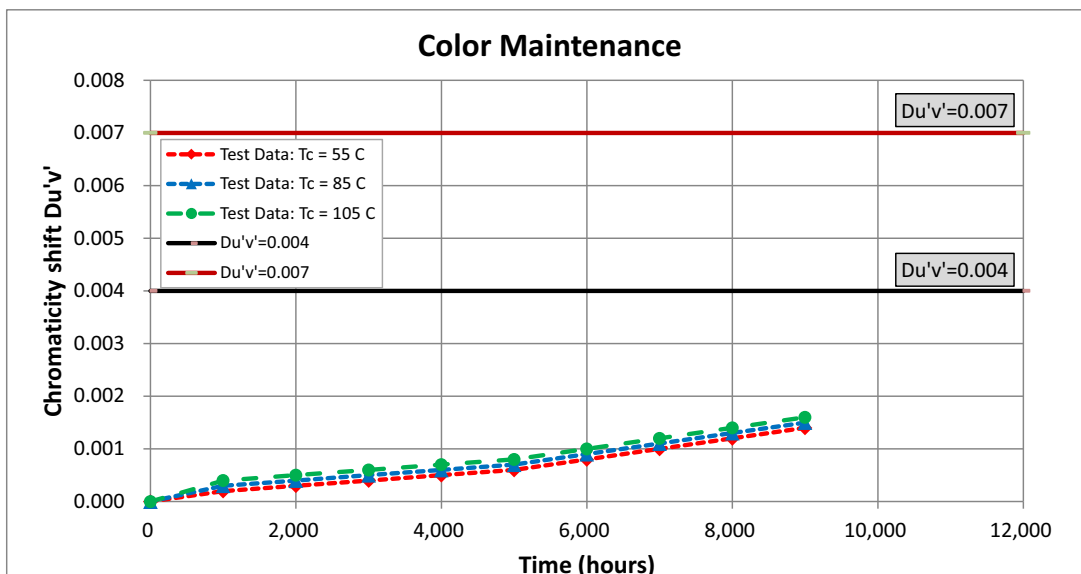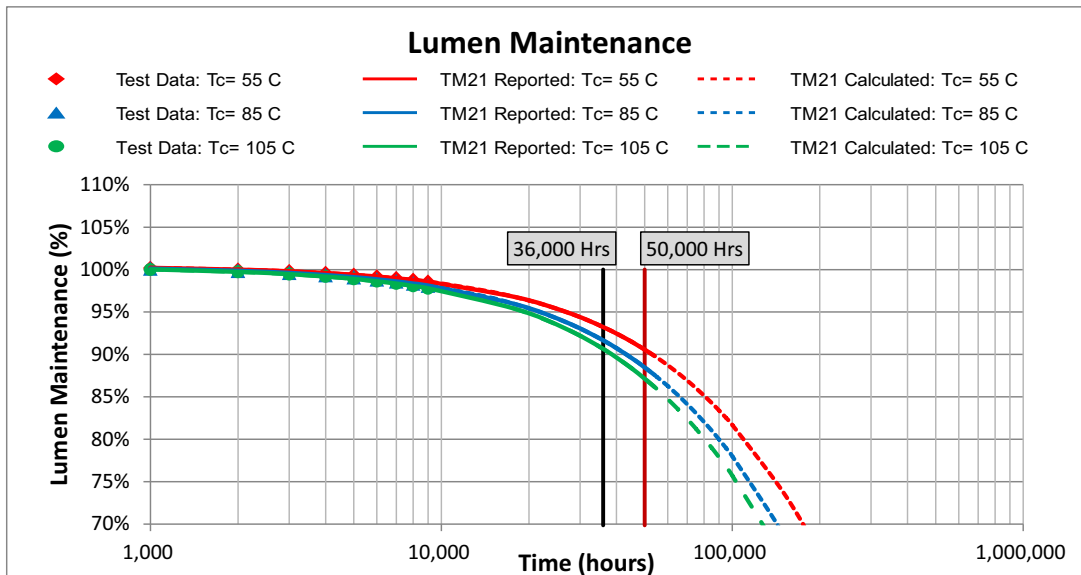



VMU140055LP8xxC



Mechanical Drawings


(Scale 1:10)

46"

[1168mm]

Overall Dimensions


Length	46" [1168mm]
Width	1.26" [32mm]
Height	0.29" [7.4mm]

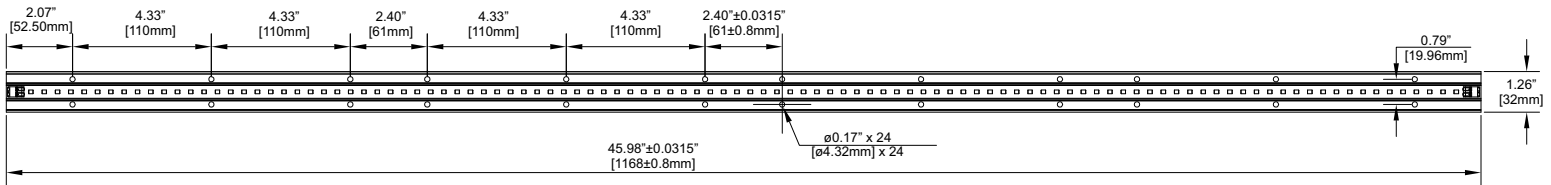

TOP VIEW



BOTTOM VIEW

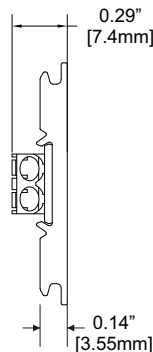

SIDE VIEW

Unmarked General Tolerance

<4" [100mm]: ±0.0138" [±0.35mm]
 4"~11.8" [100~300mm]: ±0.0197" [±0.5mm]
 >11.8" [300mm]: ±0.0236" [±0.6mm]
 HOLES: ±0.002" [±0.05mm]



VMU140055LP8xxC




Accessories

Diffuser Lens

Fulham Part Number: **TLE-OPT-120-014 (46" Diffuser Lens - 120° Beam Angle)**


- White polycarbonate diffuser lens - 82% transmissivity at nominally rated currents.

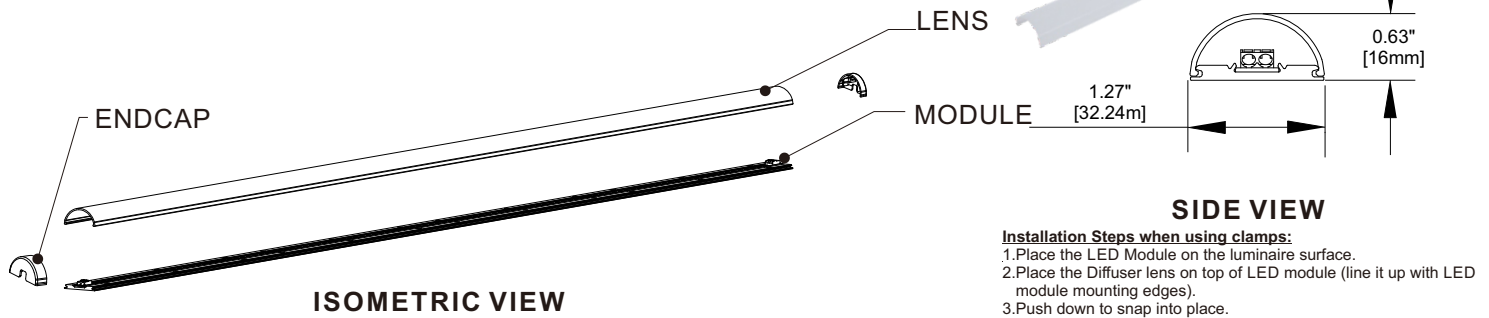

Endcap



Fulham Part Number: **VLE-OPT-120-012**

- White Polybutylene Terephthalate (PBT) end caps



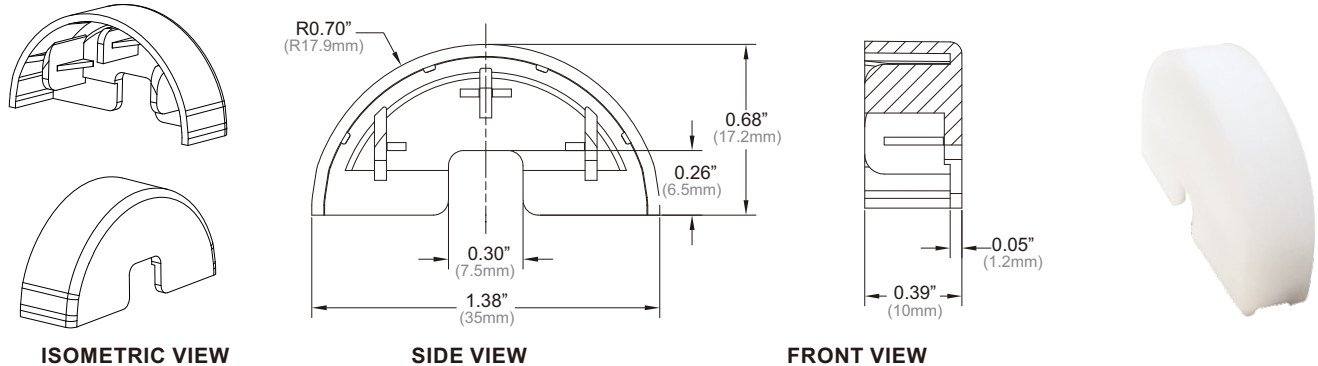


Harness

TLC-HN02 (1 and 2 module connection)



TLC-HN04 (3 and 4 module connection)

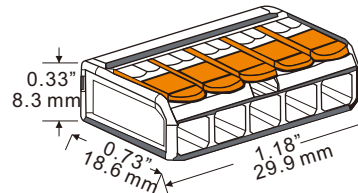


Interconnects

- Interconnect Type: WAGO Double pins to interconnect Modules (#2060-952/028-000)
- Approvals: cURus, UL 1977, and RoHS Compliant

NOTES:

- 1) Interconnects are NOT sold by Fulham.
- 2) Do not connect LinearHO Modules in parallel (end to end) if the current exceeds the maximum module rated current. This type of wiring would cause the pass-through current on the first module to exceed the rated current. This setup is in reference to wiring diagram #2 per Fulham's wiring diagram (see link on page #8). If the current is higher than the rated max, it is recommended to use wiring diagram #3.

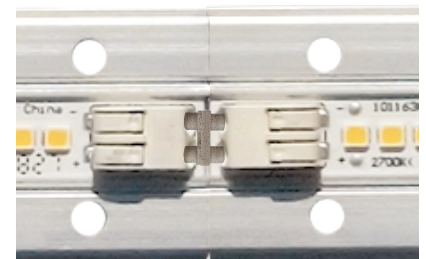


Top View




VMU140055LP8xxC



Color and Binning

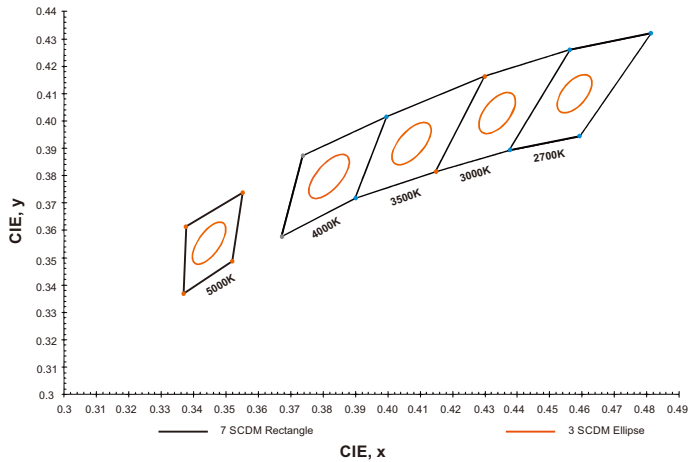

Optical Spectrum

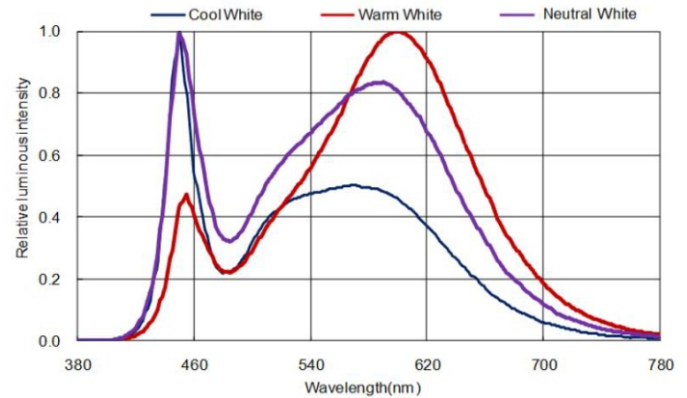

Compatible Fulham Drivers

(Please use the links below for a complete list of compatible Fulham drivers and wiring diagrams)

- LP-LinearHO System Combination:
- Fulham's Wiring Diagrams: <https://cdn.fulham.com/PDFs/SpecSheets/DC-Modules-Wiring-Diagrams.pdf>
- Compatible with Fulham Hotspot EM Systems.

NOTES:

- 1) The Color and Binning and Optical Spectrum charts are for reference only. For more detailed info, contact factory.
- 2) Reference Seoul Chromaticity Diagram for Color and Binning. Binning per ANSI C78.377-2015 @ 25°C; 3 SDCM.
- 3) The Optical Spectrum values vary depending on product type and color rank.
- 4) Driver not included.
- 5) Do not connect LinearHO Modules in parallel (end to end) if the current exceeds the maximum module rated current. This type of wiring would cause the pass-through current on the first module to exceed the rated current. This setup is in reference to wiring diagram #2 per Fulham's wiring diagram (see the link above). If the current is higher than the rated max, it is recommended to use wiring diagram #3.



Guidelines

Termination Notes

- Connector Type: WAGO #2060-452 / 998-404 (2 pin push wire connector)
 - AWG: 24...18 solid wire
 - Strip length: 7...9mm / 0.28...0.35in
 - Connector Max amp. rating: 9 Amps.




Connector

For more detail information, please visit Wago's website: <http://www.wago.com/infomaterial/pdf/51300133.pdf>

Fastening Notes

- If fastening by screw hole a recommended screw size: 6-20 x 5/8" flat head drilling screws. Use all available screw holes to ensure good contact between back side of module and mounting surface. Refer to max specified torque for installation.
- If fastening using double-sided tape, start with clean, oil-free and dust-free surface. Peel backing and place LED module on mounting surface. Firmly press down on the module to ensure good adherence. Follow the double-side tape manufacturer's installation instructions.
- BJB P2F (Push-to-Fix) fixing elements for PCBs can be used to fasten LED modules to mounting surface. Reference BJB's website for ordering information and specific model to use: <http://www.bjb.com/index.php?pid=376706&lid=10>.
- HEYCO HEYClip Snap Rivets 9035 is recommended for fast and easy installation with clean and finish look. For more detail information, please visit Heyco website: https://www.heyco.com/Nylon_PVC_Hardware/product.cfm?product=Snap-Rivets



Heyco Rivet 9035

Environmental Rating / Conformal Coating

- The DC LP-LinearHO Modules have been evaluated for use in dry or damp locations only. If used in wet locations, acceptability and the need for additional evaluation shall be determined in the end product.
- Fulham's LP-LinearHO modules are available with conformal coating; made to order with MOQ and lead time will apply. The conformal coating is a silicone based material which is double sprayed on the module only (LEDs and PCB). Conformal coating is recommended for the following applications: near ocean where salt is present, constant moisture, refrigeration, continuously high humidity, or outdoor applications. An IP rating of IP64 or IP65 is achieved when the conformal coating is used, but other factors should be considered. Fulham still recommends the luminaire also meet an IP64/65 rating.

Electrostatic Sensitive Product (ESD)

- Fulham LED products should be handled with proper measures to protect against any potential ESD damage.
- When servicing, personnel should be ground and direct contact with LED should be avoided.

Thermal Management

- Proper thermal management should be employed to ensure life and reliability of product. Max Tc of module should not be exceeded.
- Use of thermal grease, paste, pad, or other material interface is highly recommended.

Polarity Notes

- DC LP-Modules are polarity sensitive.
- Ensure that "positive" from LED Driver is connected to "positive" of LED modules and that "negative" from LED Driver is connected to "negative" of LED modules.
- Polarities of modules are marked with "+" for positive and "-" for negative.



VMU140055LP8xxC



Part Number Matrix

V M U 140 055 LP 8 XX C

Product Line	Type	Control Type	Input Current	Max. Power	Design	CRI	Color Temperature	Option
V = Vizion	M = Module (UL Class 2)	U = None	140 = 1400mA Max.	055 = 55W	LP=Low Profile	8 = 80 9 = 90	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 57 = 5700K 65 = 6500K	C = Standard Ⓢ E = Conformal Coating (MTO)

Ⓢ See page #8 for Conformal Coating information. Made to order (MTO).
All CCT and CRI options are made to order with MOQ (minimum order quantities) and lead times.


Product Image: LP-LinearHO Module



TOP VIEW

Packaging

Master Carton

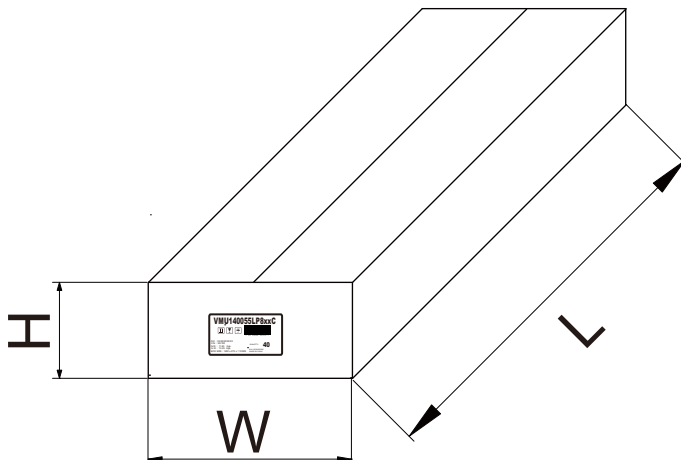

OUTER DIMENSION		
L	W	H
47.24"(1200mm)	10.63"(270mm)	4.33"(110mm)
Net Weight	Gross Weight	QUANTITY
26 lbs. (11.80kg)	29.29 lbs. (13.29kg)	40pc.