

SPECIFICATION SHEET : WH33-120-L

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	T5CR22W	T5CR22W	T5CR22W	F15T8	F15T8	F17T8	CFQ26W	CFTR32W	CFTR26W
LAMPS OPERATED	1	2	3	2	3	3	2	2	2
INPUT WATTS	30	48	65	33	42	51	50	54	51
LINE CURRENT:	0.27	0.42	0.56	0.29	0.37	0.44	0.44	0.47	0.45
POWER FACTOR	0.95	0.96	0.96	0.94	0.95	0.95	0.96	0.96	0.96
BALLAST FACTOR	1.17	0.93	0.80	1.05	0.87	0.97	0.89	0.83	0.90
EFFICACY FACTOR	3.89	1.95	1.23	3.20	2.06	1.90	1.79	1.54	1.77
THD	38%	29%	27%	31%	29%	28%	29%	28%	28%
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)								
SOUND RATING	"A"								
BALLAST TYPE	INSTANT START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
MIN. OPERATING TEMP	-30 °C (-20 °F)								
MAX. CASE TEMP	70 °C (158 °F)								
APPROVALS/CLASS	UL LISTED, CLASS "P", 1 OR 2 OUTDOOR								

MECHANICAL DATA

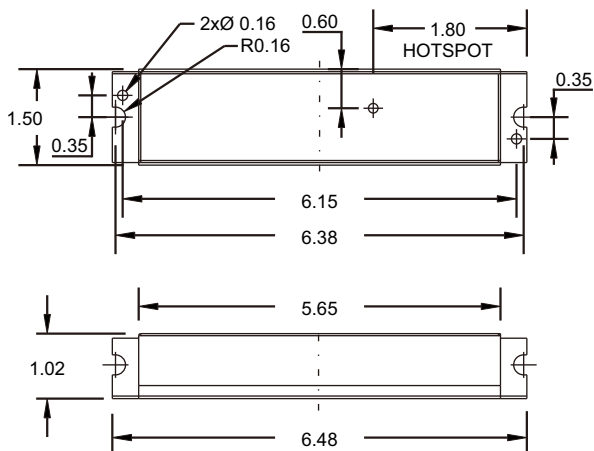

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	18 ± 1"	18 ± 1"	36 ± 1"	-	36 ± 1"	-

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-323-599-5000.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com 2006-32SP-1 rev G

SPECIFICATION SHEET : WH33-120-L

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz										
LAMP WATTS/TYPE	CFT24/27	CFT24/27	CFT40	2D55W	F15T8					
LAMPS OPERATED	1	2	1	1	4					
INPUT WATTS	28	47	50	54	53					
LINE CURRENT:	0.25	0.41	0.43	0.47	0.46					
POWER FACTOR	0.95	0.96	0.96	0.96	0.96					
BALLAST FACTOR	1.14	0.92	1.15	0.92	0.86					
EFFICACY FACTOR	3.98	1.96	2.30	1.69	1.64					
THD	32%	29%	28%	28%	28%					
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)									
SOUND RATING	" A "									
BALLAST TYPE	INSTANT START									
VOLTAGE TRANSIENTS	ANSI 62.41									
INPUT/PROTECTION	FUSE									
MIN. OPERATING TEMP	-30 °C (-20 °F)									
MAX. CASE TEMP	70 °C (158 °F)									
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR									

MECHANICAL DATA

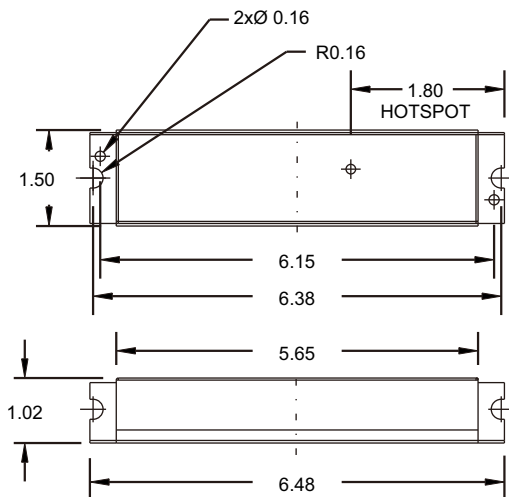

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	18 ± 1"	18 ± 1"	36 ± 1"	-	36 ± 1"	-

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-323-599-5000.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com 2006-32SP-2 rev G