

## Discontinued

SPECIFICATION SHEET: WH7-277-L

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

## **ELECTRICAL DATA (FOR 277V APPLICATION)**

INPUT VOLT: 277V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR				
*F54T5HO	4	201	0.76	0.8	0.4				
F13T8	4	66	0.26	0.8	1.3				
*F80T5HO	2	157	0.60	0.8	0.5				
F40T12	3	140	0.54	1.2	0.9				
F48T12VHO	1	111	0.43	1.1	0.95				
POWER FACTOR	> 0.9								
EMI/RFI COMPLIANCE	FCC PART 18-A								
SOUND RATING	" A "								
BALLAST TYPE	IN STANT START								
VOLTAGE TRANSIENTS	ANSIC82.11 - 1993								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	<u>-</u>								
MIN. OPERATING TEMP	- 30 °C ( '- 20 °F )								
MAX. CASE TEMP	70 °C ( 158 °F )								
ENERGY STAR 4.0	-								
APPROVALS/CLASS	*UL LISTED, CLASS " P ", 1 OUTDOOR								
	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

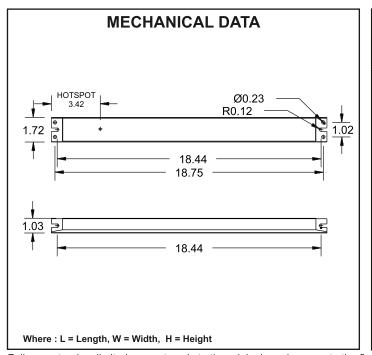

WIRING DIAGRAMS										
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN				
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-				

FOR WIRING DIAGRAM, PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2006-16SP rev F