


SPECIFICATION SHEET : WHCG2-277-T8-IS

This Is An Original Product From Fulham Co., Inc

Description : WORKHORSE Commercial Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 20%


This Ballast Will Operate Following Lamps.



ELECTRICAL DATA

INPUT VOLT: 277V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F25T8	F32T8	F17T8	F25T8	F32T8	-	-	-	-
LAMPS OPERATED	1		2						
INPUT WATTS	30.00	36.00	33.00	47.00	57.00				
LINE CURRENT:	0.12	0.14	0.13	0.17	0.21				
POWER FACTOR	> 0.90								
BALLAST FACTOR	> 0.87								
EFFICACY FACTOR	3.523	2.818	2.786	1.960	1.522				
THD	< 20 %								
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-A								
SOUND RATING	" A "								
BALLAST TYPE	INSTANT START								
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	- 18 °C (0 ° F)								
MAX. CASE TEMP	70 °C (158 ° F)								
TYPE "HL" APPROVAL	APPROVED FOR HAZARDOUS LOCATION								
ENERGY STAR 4.0	-								
APPROVALS/CLASS	UL/cUL LISTED, CLASS " P ", 1 OUTDOOR								

MECHANICAL DATA

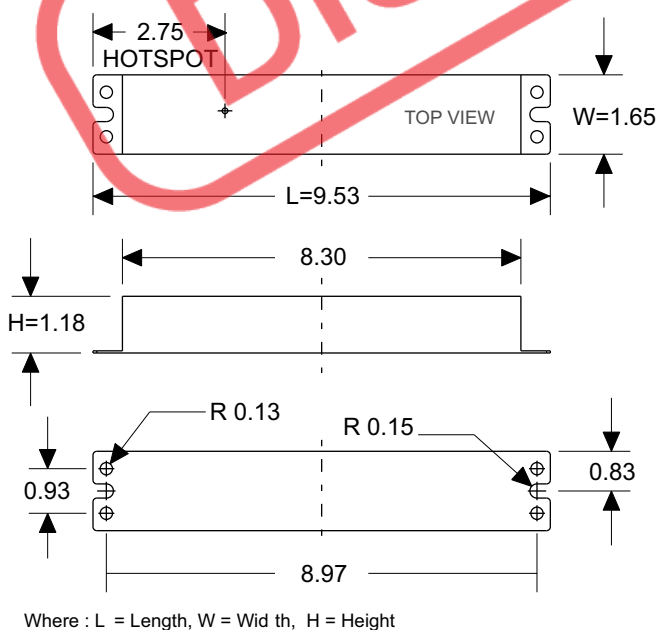

WIRING DIAGRAMS

