

SPECIFICATION SHEET : WHCG5-277-T12-RS

This Is An Original Product From Fulham Co., Inc

Description : WORKHORSE Commercial Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 20%

This Ballast Will Operate Following Lamps.




F34T12 / F40T12

ELECTRICAL DATA


INPUT VOLT: 277V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F34T12	F40T12	-	-	-	-	-	-	-
LAMPS OPERATED	2								
INPUT WATTS	63.00	72.00							
LINE CURRENT:	0.23	0.27							
POWER FACTOR	> 0.90								
BALLAST FACTOR	0.860	0.938							
EFFICACY FACTOR	1.360	1.300							
THD	< 20 %								
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-A								
SOUND RATING	"A"								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	-18 °C (0 °F)								
MAX. CASE TEMP	70 °C (158 °F)								
TYPE "HL" APPROVAL	APPROVED FOR HAZARDOUS LOCATION								
ENERGY STAR 4.0	-								
APPROVALS/CLASS	UL /cUL LISTED, CLASS "P", 1 OUTDOOR								

MECHANICAL DATA

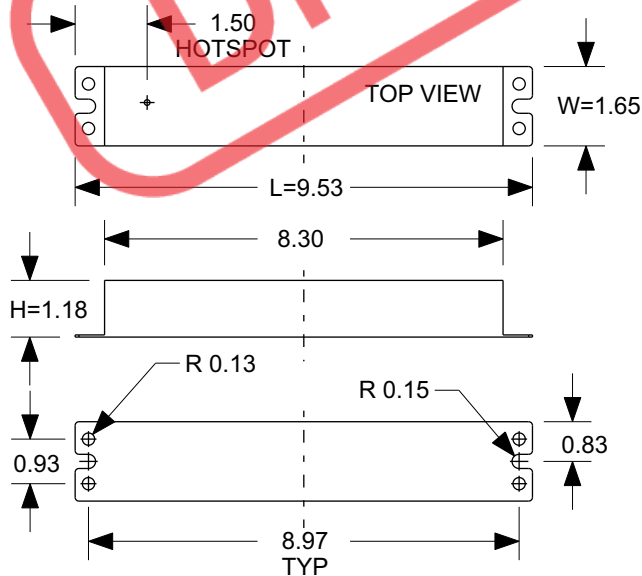

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	28 ± 1"	28 ± 1"	30 ± 1"	30 ± 1"	46 ± 1"	

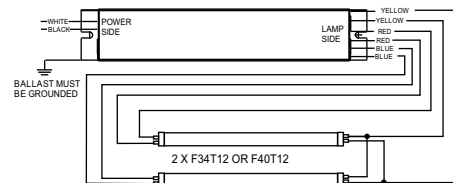

NOTE : This Ballast Case Must Be Grounded