



T1240048V-150EE

SPECIFICATIONS

IP 20




- **SLIM Constant Voltage LED Driver**
- **Flicker free, O/P Ripple Current < 10%**
- **Output Wattage : 150W Max**
- **Output Current: 3.13A**
- **Output voltage 48Vdc**
- **Application**
- CV indoor Lights

General Specifications


Rated Input Voltage	240VAC ±10%, 50/60Hz
Operating Input Voltage Range	196-264VAC, 50/60Hz
Input Current	0.95 A Max.
Input Power	167W Max.
Power Factor	>0.95 @ 230Vac Full Load
THD	< 10% @ 230Vac Full Load
Efficiency	>88%
Driver Type	Constant Voltage
Output Current	3.13A
Output Voltage Range	48VDC ±5%
Output Power	150W
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	NA
RFI/EMI	CE
Output Type	Class II
Ambient Operating Temperature Range	-20°C to 45°C
Max. Case Temperature	85°C
Sound Rating	NA
Input Surge Protection	Line-Neutral 1kV
Protections	Input Over Current : NON-Resettable Input Over Voltage : NA Input Under Voltage : NA Output Short Circuit : Auto recovery Output Open Circuit : Auto recovery Output Overload : YES Over Temperature : YES
Service Life	50,000 hours @ Tc 85°C
Approvals / Class	Dry Locations
Warranty	3 Years
Weight	0.220Kg

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years @ Tc 85°C from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.


THD vs. Load

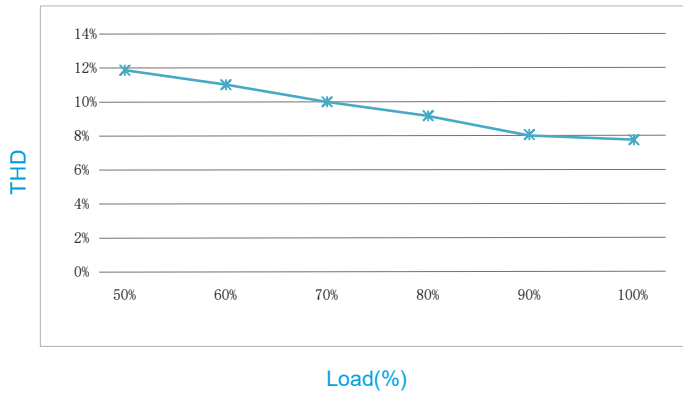


Efficiency vs load

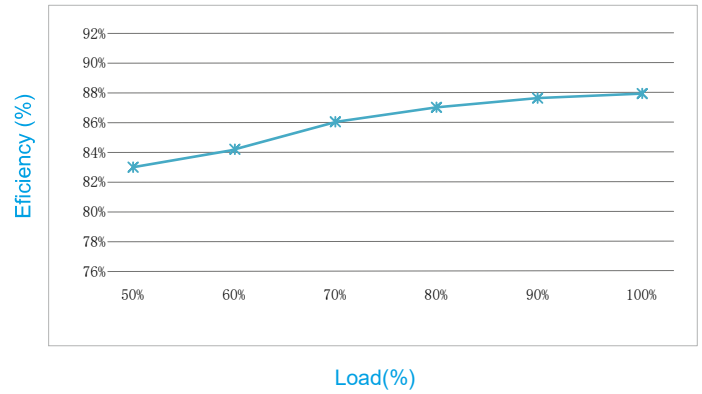


Power factor vs. Load

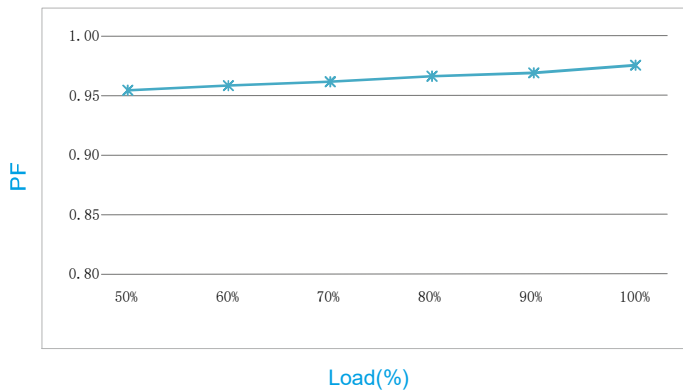

Life vs. Tc curve

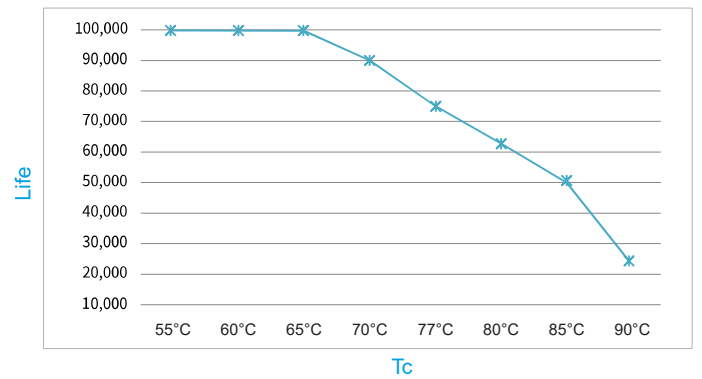


Operating Window

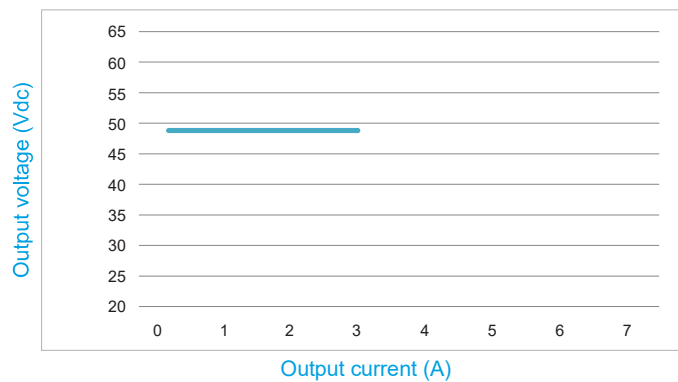

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years @ Tc 85°C from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

Mechanical Data

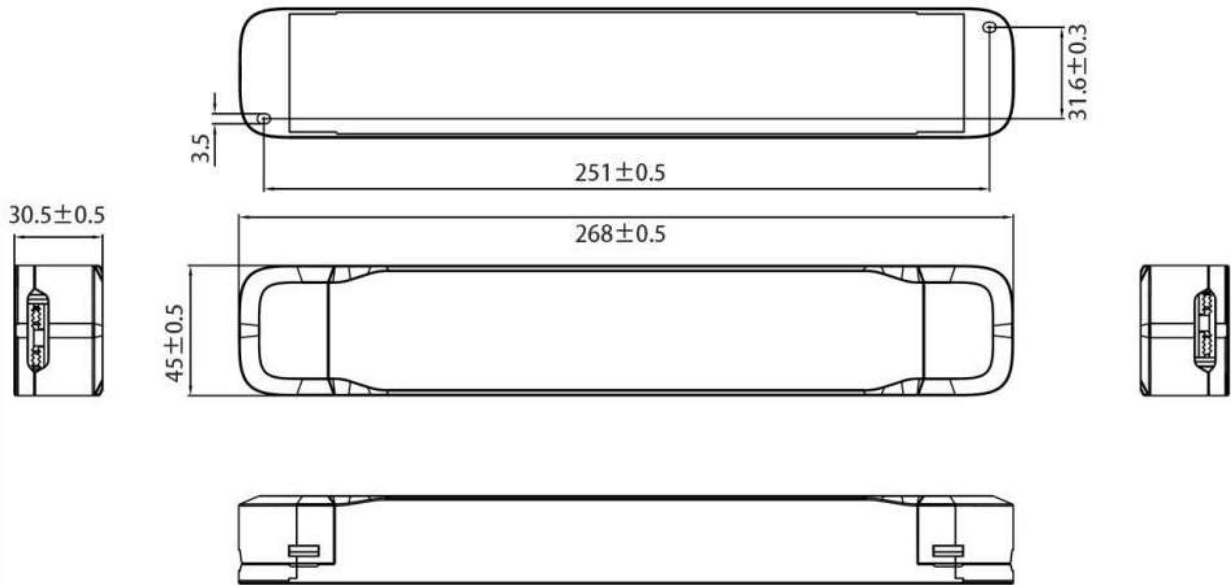


Product Image



Note : All Dimensions are in mm.

Tolerance= ± 0.5 mm

Packaging

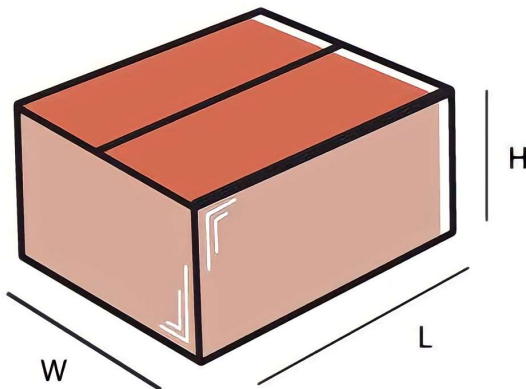

Master carton

OUTER DIMENSION		
L	W	H
315mm	225mm	150mm
Net Weight	Gross Weight	QUANTITY
11.59 kg	11.90 kg	32 pc.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years @ Tc 85°C from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.