

Description: 8.10 W Linear LED Module / 570X13.5mm / 36LEDs / S12 P3

This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 225mA and Voltage 36Vdc

ELECTRICAL DATA


NOMINAL INPUT VOLTAGE (V _{DC})	36
NOMINAL INPUT CURRENT (mA)	225
NOMINAL POWER CONSUMPTION(W)	8.10
PCB SIZE (mm)	LINEAR 570 x 13.5MM
PCB MATERIAL TYPE	FR-4
CCT	5700K / 4000K / 3000K
CALCULATED USABLE ARRAY FLUX (lm)	1400 / 1100 / 1100
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	30
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-40 to 85
MAXIMUM T _c (°C)	75
BEAM ANGLE	120°
CRI (Typ)	80

MECHANICAL DATA

PCB SIZE-550x13.5MM

SYM	DIAM	TOL	QTY	NOTE
x	3.050	±0.05	3	
TOTAL			3	

WIRING DIAGRAMS

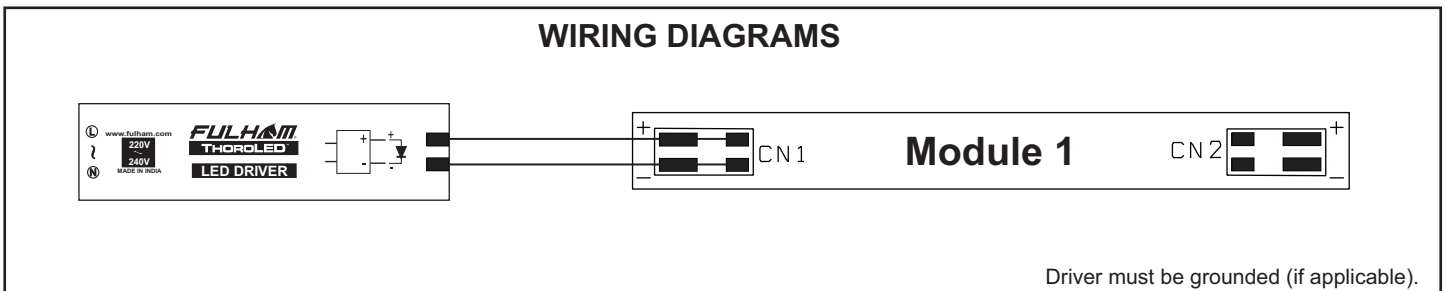

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.