



# FHEM11RH


## Micro Adjustable Square-Head Remote Lamps

- Incandescent lamp for use in areas requiring remote lighting
- Single and double remote lamps
- For indoor applications
- High impact resistant white thermoplastic housing
- Each lamp head is used as part of an emergency lighting system
- Compatible with FHEM11 and FHEC31 series<sup>①</sup> <sup>②</sup>
- Each lamp head is fully adjustable and glare-free
- Recommended Max Mounting Distance <20ft using 18 gauge wire \*

### General Specifications

Input Power	5.4W
Input Voltage	6V
Number of Heads	1
Overall Size	5.875" L x 4.25" W x 5.5" H - Single Lamp
Emergency Operation	90 minutes
Compliance	UL 924 Listed Damp Location
Warranty	5 years from the date of manufacture

### Mechanical Data

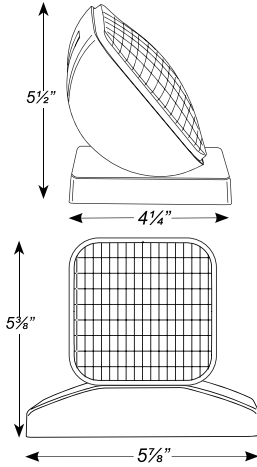

### Part Number Matrix

FH    EM    11    RH    1    6V    5

FireHorse    Emergency Luminaire    Model Number    RH=Remote Head    Number of Heads    Voltage    Wattage Per Head  
 1 = 1 Head    6V = 6Volts    5 = 5.4W

- ① Compatible Series are UL Listed with Remote Heads
- ② All remote capable models will run two 1 head units or one 2 head unit.

\* If you exceed the recommended wiring distance noticeable lumen loss will occur