



FHEM11RH


Micro Adjustable Square-Head Remote Lamps

- Incandescent lamp for use in areas requiring remote lighting
- Single and double remote lamps
- For indoor applications
- High impact resistant white thermoplastic housing
- Each lamp head is used as part of an emergency lighting system
- Compatible with FHEM11 and FHEC31 series ①
- Each lamp head is fully adjustable and glare-free
- Recommended Max Mounting Distance <20ft using 18 gauge wire *

General Specifications

Input Power	5.4W
Input Voltage	6V
Number of Heads	1
Overall Size	5.875" L x 4.25" W x 5.5" H - Single Lamp
Emergency Operation	90 minutes
Compliance	UL 924 Listed Damp Location
Warranty	5 years from the date of manufacture

Mechanical Data

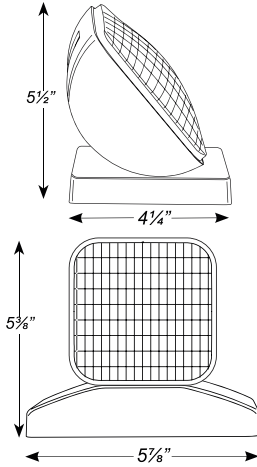

Part Number Matrix

FH **EM** **11** **RH** **1** **6V** **5**

FireHorse Emergency Luminaire Model Number RH=Remote Head Number of Heads
1 = 1 Head Voltage Wattage Per Head
6V = 6Volts 5 = 5.4W

① Compatible Series are UL Listed with Remote Heads

* If you exceed the recommended wiring distance noticeable lumen loss will occur