




## SPECIFICATION SHEET : PET-120-12-150W-L

This Is An Original Product From Fulham Co., Inc

**Description : PONY ET Series, High Frequency Electronic, Short Circuit, Over Load &, Thermal Protection. Dimming Capability.**


**This Ballast Will Operate Halogen Lamps with max load of 150W.**

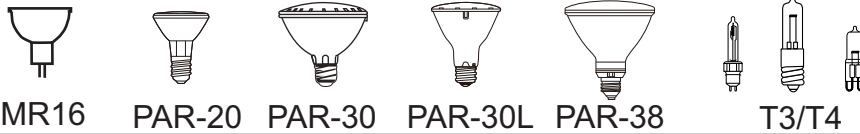

### ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz	
LAMPS OPERATED	HALOGEN TYPE LAMP
MAX LOAD	150W MAX.
MINI LOAD	50W MINI
INPUT CURRENT @ MAX LOAD:	1.25AMP
OUTPUT CURRENT @ MAX LOAD:	12.56AMP
POWER FACTOR	0.985
MAX. HARMONIC DISTORTION	< 14.80 %
MIN LOAD W/O DIMMER	20W
MIN LOAD WITH DIMMER	35W
CURRENT THD	20%
VOLTAGE THD	5%
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)
SOUND RATING	"A"
DIMMER CAPABILITY	YES
AUTO-RESET THERMAL CUTOFF @125C	YES
SHORT CIRCUIT/OVERLOAD PROTECTION	YES
VOLTAGE TRANSIENTS PROTECTION	ANSI 62.41 AUTO RESET
MIN. OPERATING TEMP	35 °C
MAX. CASE TEMP	90 °C ( 194 ° F )
APPROVALS/CLASS	UR /cUR RECOGNIZED COMPONENT


### MECHANICAL DATA

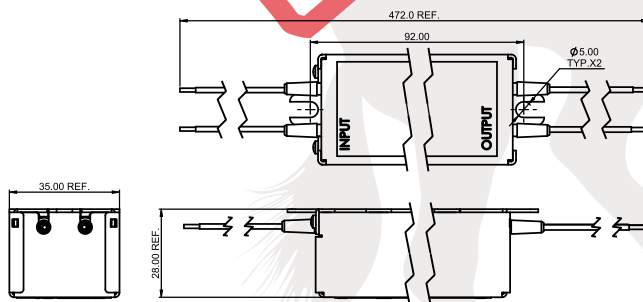

Where : L = Length, W = Width, H = Height

### WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	6 ± 1"	6 ± 1"		6 ± 1"		

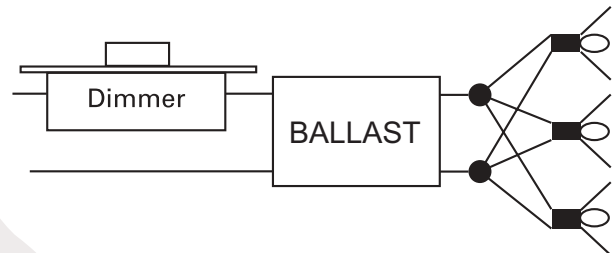

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 2 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-323-599-5000.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: [www.fulham.com](http://www.fulham.com)

2011-258 rev