

SPECIFICATION SHEET : SC-230-113-CFL

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,

This Ballast Will Operate Following Lamps.





QUAD (CFQ/E), 4 PIN
13W



TRIPLE(CFTR/E), 4 PIN
13W

ELECTRICAL DATA

INPUT VOLT: 230V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	13CFQ/E	13CFTR/E	-	-	-	-	-	-	-
LAMPS OPERATED	1	1							
INPUT WATTS	15.23	14.86							
LINE CURRENT:	0.130	0.126							
POWER FACTOR	0.510	0.513							
BALLAST FACTOR	1.073	1.044							
EFFICACY FACTOR	7.046	7.024							
THD	158.70	156.60							
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 °C (32 ° F)								
MAX. CASE TEMP	75 °C (167 ° F)								

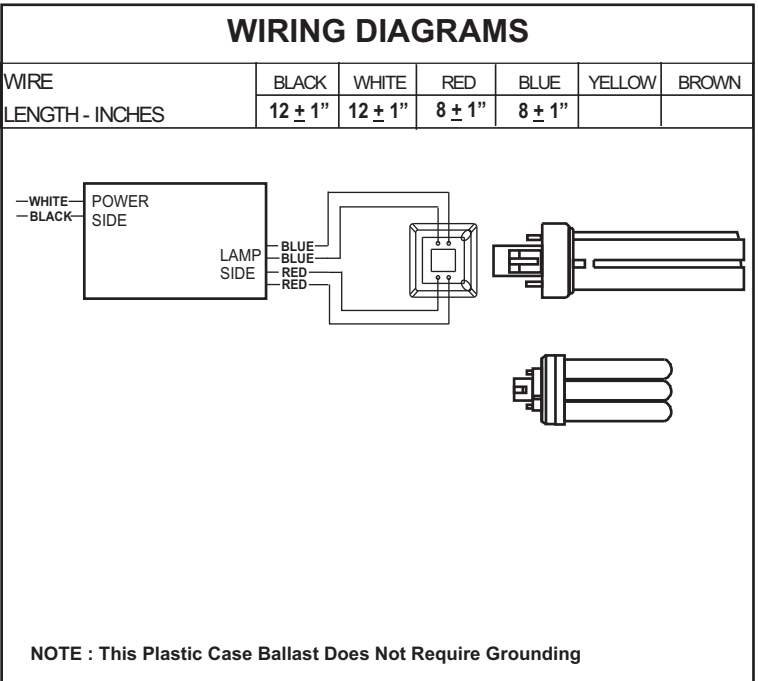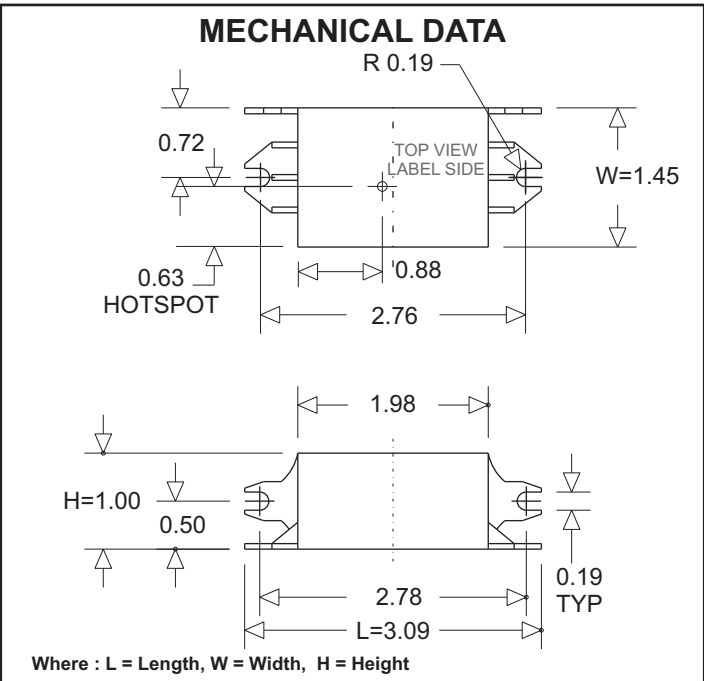

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 2 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com