

SPECIFICATION SHEET : TCD3MLT0350-50L

IP62

This Is An Original Product From Fulham Co., Inc

Description : Independent direct current power supply. High efficiency and Reduced weight and size. Constant output current. Power output 6 Watts.


This Driver Will Operate Following LED Lamps.

Philips Luxon LED, Bin Code B or C

ELECTRICAL DATA


INPUT VOLT: 100V ~240V± 10%, 50/60Hz	
POWER FACTOR	>0.9
EFFICIENCY	85% @ 120V Full load
CURRENT PROTECTION	Yes
LED TYPES OPERATED	Philips Luxon LED, Bin Code B or C
NUMBER OF LEDS	6 ~ 16 LEDs/ Channel
CONSTANT CURRENT, VOLTAGE OR POWER	Constant Current
OUTPUT CURRENT	0.350A / Channel
OUTPUT VOLTAGE	Max. 59V / Channel @ No Load
OUTPUT SHORT CIRCUIT PROTECTION	Yes
OUTPUT OPEN CIRCUIT PROTECTION	Yes
OUTPUT TO GROUND SHORT PROTECTION	Yes
OVER LOAD PROTECTION	Yes
MAX. CASE HOT SPOT TEMPERATURE	75 °C
MIN. LAMP STARTING TEMPERATURE	-30°C
SERVICE LIFE	50,000 hours
APPROVALS/CLASS	cURus

MECHANICAL DATA

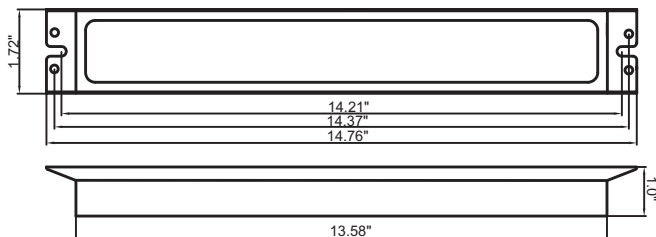

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

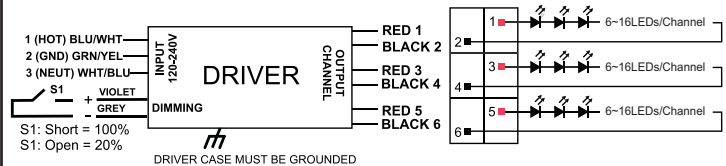

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 323-599-5000.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com

2011-1006 REV B