

SPECIFICATION SHEET: <u>TMB72RT21XX2NS36P1M16XTE-XP-G-XP-L</u>

THOROLED* This Is An Original Product From Fulham (India) Pvt., Ltd.


Description: 151W Rectangle LED Module / 330x180mm / 72LEDs / S36 P1 2Channel


This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 700mA and Voltage 108Vdc per Channel

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (Vpc)	2x108
NOMINAL INPUT CURRENT (mA)	2x700
NOMINAL POWER CONSUMPTION(W)	2x75.5=151
PCB SIZE (mm)	RECTANGLE 330 x 180MM
PCB MATERIAL TYPE	MCPCB
ССТ	5000K
CALCULATED USABLE ARRAY FLUX (lm)	2x9200=18400
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	260
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM Tc (°C)	100
BEAM ANGLE	115°
CRI (Typ)	80

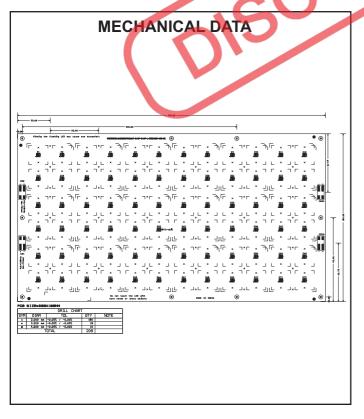

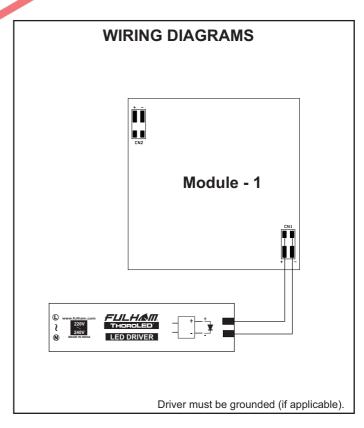

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.