

Discontinued

Contact Fulham for availability. Not for use in new designs.



SPECIFICATION SHEET: WH4-277-L

This Is An Original Product From Fulham Co., Inc.

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (FOR 277V APPLICATION)

| INPUT VOLT: 277V ± 10%, 50/60Hz | | | | | | | | |
|---------------------------------|--|-------|---|---|---|---|---|---|
| LAMP WATTS/TYPE | F28T5 | F35T5 | - | - | - | - | - | - |
| LAMPS OPERATED | 2 | 2 | | | | | | |
| INPUT WATTS | 54 | 59 | | | | | | |
| LINE CURRENT: | 0.21 | 0.23 | | | | | | |
| POWER FACTOR | 0.92 | 0.93 | | | | | | |
| BALLAST FACTOR | 0.86 | 0.80 | | | | | | |
| EFFICACY FACTOR | 1.60 | 1.36 | | | | | | |
| THD | 31.6% | 27.8% | | | | | | |
| EMI/RFI COMPLIANCE | FCC PART 18-A(non-Consumer) | | | | | | | |
| SOUND RATING | " A " | | | | | | | |
| BALLAST TYPE | INSTANT START | | | | | | | |
| VOLTAGE TRANSIENTS | ANSI 62.41 | | | | | | | |
| INPUT/PROTECTION | FUSE | | | | | | | |
| MINI. LAMP START | SEE LAMP SPECS | | | | | | | |
| MIN. BALLAST OPERATING TEMP | -30 °C (-20 °F) | | | | | | | |
| MAX. CASE TEMP | 70 °C (158 °F) | | | | | | | |
| ENERGY STAR 4.0 | - | | | | | | | |
| APPROVALS/CLASS | UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR | | | | | | | |



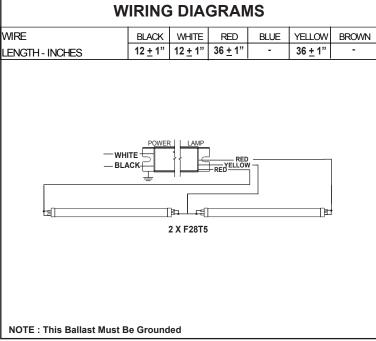

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000.</u>
DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.